Product and Cut-out Dimensions G2000 Series Dishwashers Fully Integrated Models

lower left rear.

center rear.


W - 5 foot "Double Waterproof" flexible water intake hose connects lower

Notes

· All installations must be done in

accordance with local codes



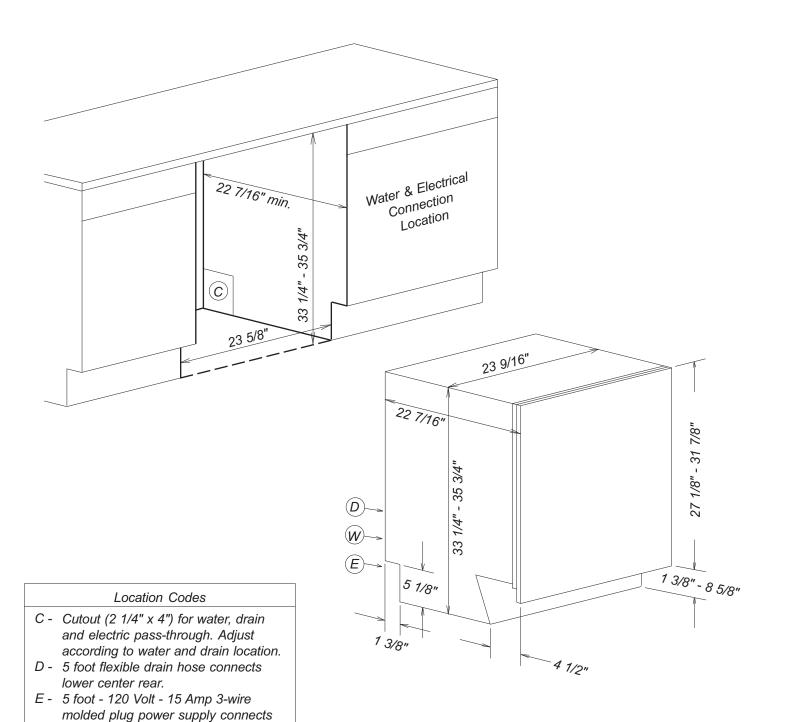

NOTE: Drawing is not to scale. SPECIFICATION SHEETS 010106


Front Panel Information G2000 Fully Integrated Models



Custom Panel Installations

Some Miele dishwashers do not come equipped with a front panel. These dishwashers are designed to accept a custom door panel supplied by the cabinet maker. Miele has a unique panel integration system which allows the dishwasher to align with the surrounding cabinets.

Panel size is determined in the following manner:

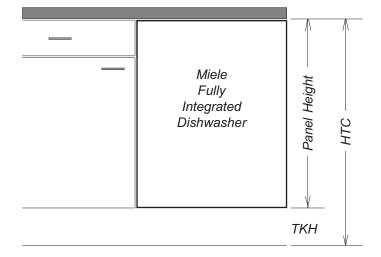

Width: 23 7/16" in all cases

Thickness: 3/4" in all cases

Height: Determined using the following calculation:

Panel Height = HTC - TKH

HTC = Height to the underside of countertop

TKH = Toe-kick height

Note: Control panel is along the top edge of the unit. It

is not visible when the unit is closed.

A handle **MUST** be located on the front panel in

order to open the unit

Maximum panel height: 31 7/8"
Minimum panel height: 27 3/16"


Maximum panel weight: 21 Pounds


GFVi Installations

In lieu of a custom front, Miele offers a decorative panel system called a GDU kit. GDU kits vary depending upon the model chosen. Each GDU kit contains a front panel and a toe-kick cover.

Installation Information G2000 Dishwashers






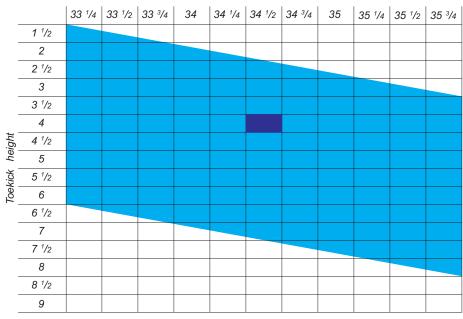

Acceptable combinations
Typical American installation

Water Connection

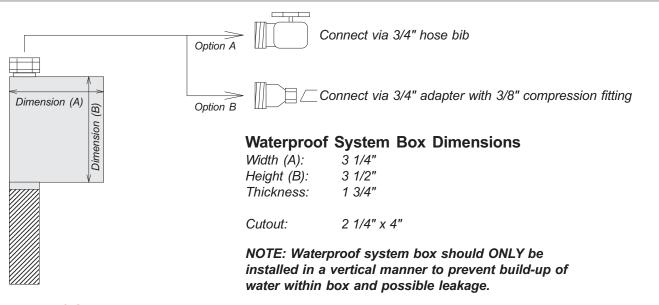

Waterproof System

Temperature: 110° - 130° F
Pressure: 4.5 - 145 PSI
Drain hose: 7/8" ID - 5 feet long